


CBU-PWM4

CASAMBI Bluetooth controllable 4ch PWM dimmer

CASAMBI



Dimensions

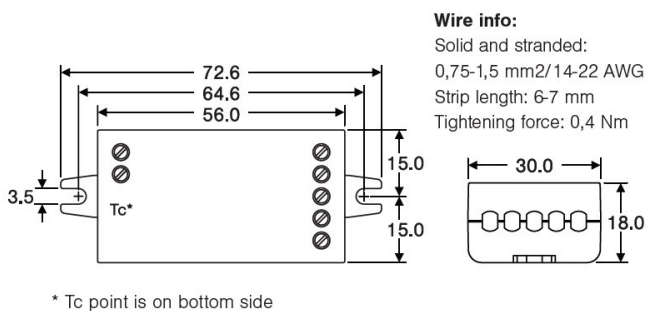

Description

CBU-PWM4 is a Bluetooth controllable, Casambi enabled four channel PWM dimmer for constant voltage LED loads, such as LED strips and constant voltage LED modules. It is connected between a 12-24 VDC power supply and the constant voltage LED load.

CBU-PWM4 can control up to four channels making it an ideal partner for RGBW and tunable white (TW) applications. The maximum total output current is 6 A which can be freely divided between 1-4 channels. CBU-PWM4 is protected against overvoltage, overcurrent and short circuit situations. CBU-PWM4 is not protected against reverse polarity!

CBU-PWM4 can be controlled with Casambi app which can be downloaded free of charge from Apple App Store and Google Play Store.

Different Casambi enabled products can be used from a simple one luminaire direct control to a complete and full featured light control system where up to 250 units form automatically an intelligent mesh network.



Warning!

Hazardous voltages. Risk of electric shock or fire. Only qualified professionals should make the connections. Disconnect the mains power supply and verify its absence prior to installation.



Installation

Connect a constant voltage 12-24 VDC double insulated power supply to the input connector. Make sure not to use a constant current LED driver and make sure that the cable polarity is correct.


The product has one shared positive output connector (+) and each of the four channels have its own negative connector (-). This is the most typical case with multichannel LED strips. Connect the LED load wires accordingly. Please note, most led strips will permanently damage if reverse polarity.

CBU-PWM4 can be configured having different types of outputs, such as 4 channel RGBW, 3 channel RGB or 2 channel TW. Also, it is possible to configure 1-4 jointly and individually dimmable channels. These configurations can be made by the end user from Casambi App.


As default, CBU-PWM4 is delivered with RGBW configuration.

CBU-PWM4, as any other Casambi product, should not be placed in a metal enclosure or next to large metal structures. Metal will effectively block all radio signals which are crucial to the operation of the product.


Wiring diagram, RGBW

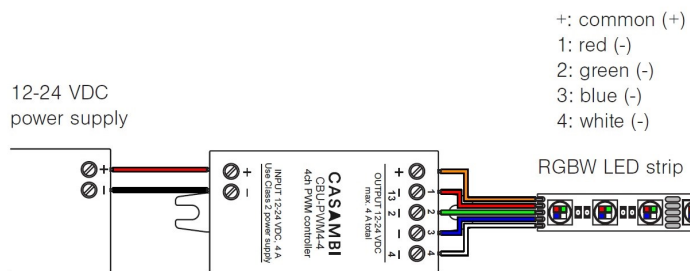

Wiring diagram, tunable white

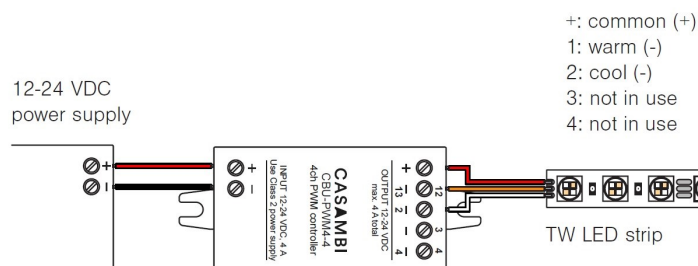

Wiring diagram, 1-4 separate channels

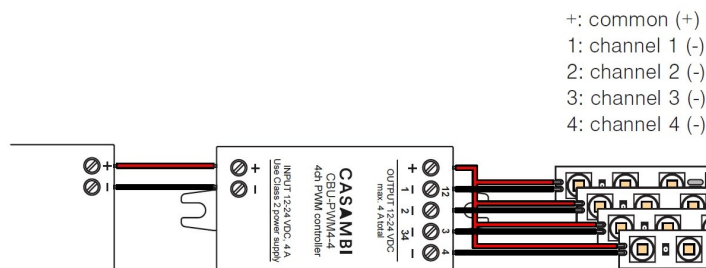

Technical Data

Input

| | |
|------------------------|-----------|
| Voltage range: | 12-24 VDC |
| Max. input current: | 6 A |
| No-load standby power: | < 0,3 W |

Output

| | |
|------------------------|--|
| Output voltage: | same as input voltage |
| Max. output power: | 144 W @ 24 VDC 72 W @ 12 VDC |
| Max. output current: | 6 A (can be freely divided between the channels) |
| Min. load requirement: | 0 W |
| Dimming method: | Pulse Width Modulation (PWM) |

Radio transceiver

| | |
|------------------------|---------------|
| Operating frequencies: | 2400-2480 MHz |
| Maximum output power: | +4 dBm |

Operating conditions

| | |
|----------------------------|--------------------|
| Ambient temperature, ta: | -20...+45°C |
| Max. case temperature, tc: | +75°C |
| Storage temperature: | -25...+75°C |
| Max. relative humidity: | 0...80%, non-cond. |

Connectors

| | |
|--------------------------------|---|
| Wire range, solid & stranded: | 0,75 - 1,5 mm ² 14 - 22 AWG |
| Wire strip length: | 6 - 7 mm |
| Tightening force: | 0,4 Nm |
| Maximum input cable length: | 3 m |
| Recommended load cable length: | max 3m |


Mechanical data

| | |
|-----------------------|------------------------|
| Dimensions: | 72,6 x 30,0 x 18,0 mm |
| Weight: | 23 g |
| Degree of protection: | IP20 (indoor use only) |

Range

Compatible devices:

iPhone iOS 10 and later are supported
iPad iOS 10 and later are supported
Android 4.4 version (KitKat) and later are supported

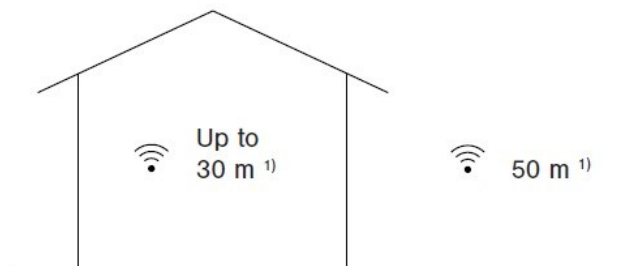

Casambi uses mesh network technology so each Casambi unit, or Casambi Ready product, acts also as a repeater. Longer ranges can be achieved by any using Casambi unit as a repeater.

1) Range is highly dependant on the surrounding and obstacles, such as walls and building materials.

Disposal Instructions

In line with EU Directive 2002/96/EC for waste electrical and electronic equipment (WEEE), this electrical product must not be disposed of as unsorted municipal waste. Please dispose of this product by returning it to the point of sale or to your local municipal collection point for recycling.

Fixture Profile

| Profile # | Profile | Description |
|-----------|----------------------------|--|
| 8122 | 1xDIM | Basic one channel PWM dimmer. |
| 4031 | 2xDIM | Two channel PWM dimmer. |
| 4032 | 3xDIM | Three channel luminaire. |
| 4033 | 4xDIM | Four channel luminaire. Note that zeroDetect, if used, must be on 'High when present' mode. |
| 4029 | RGB | Three channel RGB PWM dimmer. |
| 5037 | RGB 625Hz | Three channel RGB PWM dimmer. |
| 4885 | RGB/White | Four channel RGB fixture with White. The ratio between RGB and White is selected with mixer. |
| 4027* | RGBW | Four channel RGB fixture with White. RGB is always present but amount of White be adjusted. |
| 4887 | Sliders/RGBW | Fixture using PWM channels with custom elements. This fixture provides a dimmer control but it does not consume PWM channel; it will be only used to multiply the output of selected custom elements. |
| 4030 | TW | Two channel warm/cool mixer. |
| 8331 | TW (WW-CW dimmer) | Single dimmer controlling two output channels. This can used to implement, for example, warm dimming or constant current solution where changing voltage and PWM based dimming techniques are combined together. |
| 8280 | 3CH (White, Cold, Warm) | Three channel luminaire with simulated tuneable-white effect for dimmer and color temperature |

*Default profile