


# Casambi Push button Coupler



**Important:** Read All Instructions Prior to Installation

## Function introduction

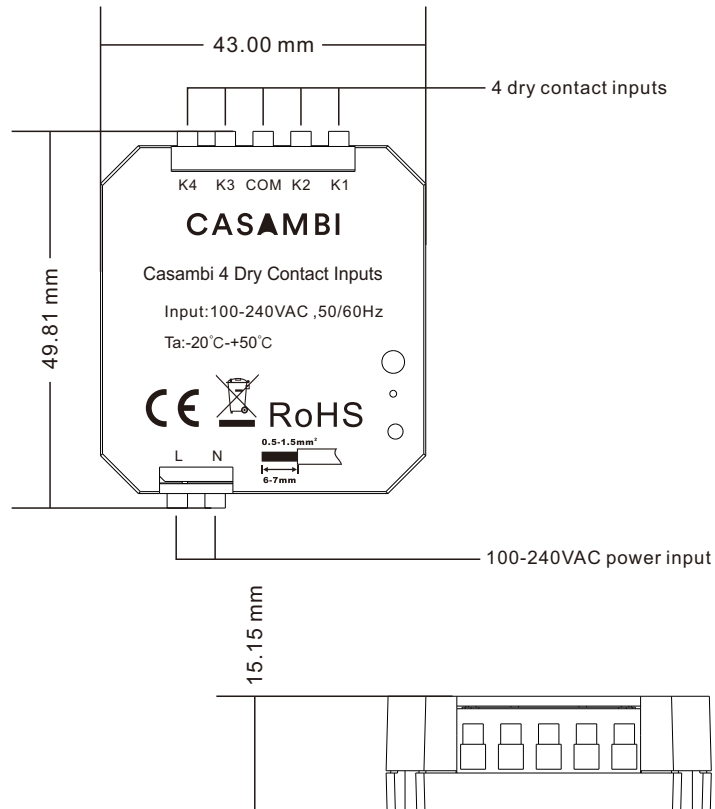

## Product Data

Protocol	Casambi
Power Supply	100-240VAC
Contact	4 dry contacts
Dimensions	49.81x43x15.15mm
Operating Temperature	0 °C ~ +40 °C
Working Humidity	8% ~ 80%
Waterproof Grade	IP20
Warranty	5 years

- Casambi push button coupler
- 4 dry contacts, can connect to 4 push buttons
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
- The range for wireless communication is about 50 meters in typical indoor environment, actual range is dependent on field installation
- Button function can be freely configured by Casambi app to control a luminaire, a group, an element, a scene, whole network, etc
- Waterproof grade: Ip20
- 5 years warranty

## Safety & Warnings

- DO NOT install the device with power applied.
- DO NOT expose the device to moisture.

## Wiring Diagram


### Notes for the diagrams:

**L** - terminal for live lead input

**N** - terminal for neutral lead input

**K1-K4** - terminals for push buttons

**COM** - common terminal for grounding to the push buttons connected to the coupler

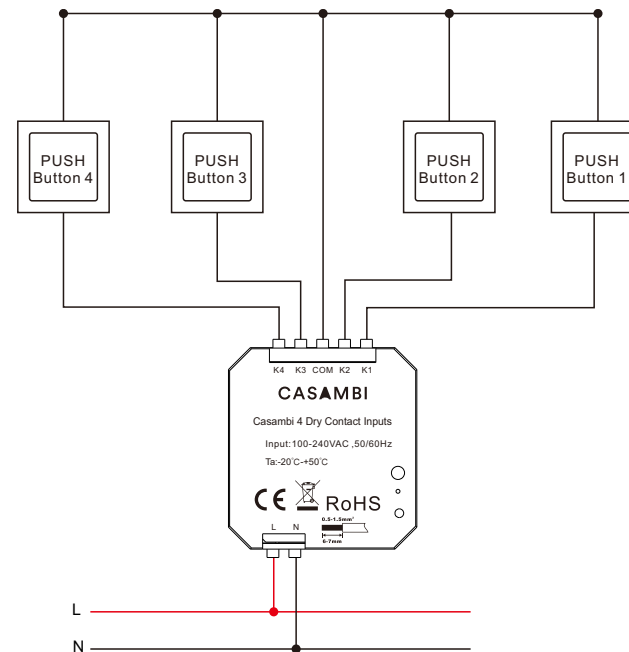

## Configure push button function via Casambi APP

**Step 1:** Open the Casambi app and add the coupler to your Casambi network. After a successful addition, the coupler will be shown in the **Switches** view.

**Step 2:** In the **Switches** view, tap the coupler to configure its button functions. Four push buttons are available for configuration. Each button can be configured to control a luminaire, a group, a scene, an element or all luminaires.

**Step 3:** After configuration, both the push button and the app can control the lighting.

**Note:** Please refer to the Casambi App User Manual for more detailed instructions if needed.